



Boring Bars

S-SDUCR/L for 7° Positive 55° Rhombic DC__ Inserts



APPLICABLE INSERT

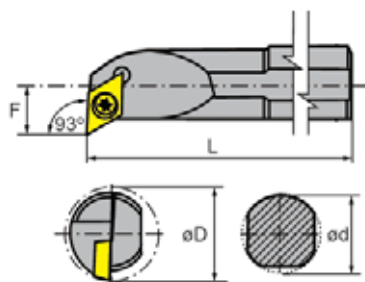

RIGHT HAND SHOWN

Right Hand

Type S-SDUCR/L	Ød (Inch)	L (Inch)	ØD (Inch)	F (Inch)	Applicable Inserts	Code
6-2	0.375	6	0.625	0.375	DC_21.5	534331
8-2	0.500	6	0.780	0.437	DC_21.5	534332
10-2	0.625	8	0.840	0.500	DC_21.5	534333
12-3	0.750	10	1.125	0.562	DC_32.5	534334
16-3	1.000	12	1.500	0.750	DC_32.5	534335

Left Hand

Type S-SDUCR/L	Ød (Inch)	L (Inch)	ØD (Inch)	F (Inch)	Applicable Inserts	Code
6-2	0.375	6	0.625	0.375	DC_21.5	534341
8-2	0.500	6	0.780	0.437	DC_21.5	534342
10-2	0.625	8	0.840	0.500	DC_21.5	534343
12-3	0.750	10	1.125	0.562	DC_32.5	534344
16-3	1.000	12	1.500	0.750	DC_32.5	534345

Accessories

Screw



For Type S-SDUCR/L	Code
6-2, 8-2, 10-2	210350
12-3, 16-3	210351

Torx® Key



For Type S-SDUCR/L	Torx® Key	Code
6-2, 8-2, 10-2	T7	549505
12-3, 16-3	T15	302319