



Boring Bars

S-SDUCR for 7° Positive 55° Rhombic DC_ _ Inserts



APPLICABLE INSERT

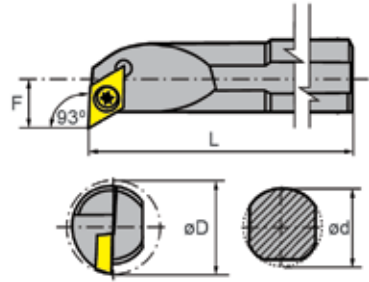



RIGHT HAND SHOWN

S-SDUCR	Ød (Inch)	L (Inch)	ØD (Inch)	F (Inch)	Right Hand Code	Accessories		
						Applicable Insert	Screw Code	Torx® Key Code
6-2	0.375	6	0.625	0.375	534331	DC_ _21.5_	210350	549505
8-2	0.500	6	0.780	0.437	534332	DC_ _21.5_	210350	549505
10-2	0.625	8	0.840	0.500	534333	DC_ _21.5_	210350	549505
12-3	0.750	10	1.125	0.562	534334	DC_ _32.5_	210351	302319
16-3	1.000	12	1.500	0.750	534335	DC_ _32.5_	210351	302319

S-STUCR for 7° Positive Triangular TC_ _ Inserts




APPLICABLE INSERT




RIGHT HAND SHOWN

S-STUCR	Ød (Inch)	L (Inch)	ØD (Inch)	F (Inch)	Right Hand Code	Accessories		
						Applicable Insert	Screw Code	Torx® Key Code
8-2	0.500	6	0.590	0.287	534351	TC_ _21.5_	210350	549505
10-2	0.625	8	0.750	0.350	534352	TC_ _21.5_	210350	549505
12-3	0.750	10	0.845	0.422	534353	TC_ _32.5_	210351	302319
16-3	1.000	12	1.115	0.555	534354	TC_ _32.5_	210351	302319

S-SCLCR for 80° Rhombic CC_ _ Inserts

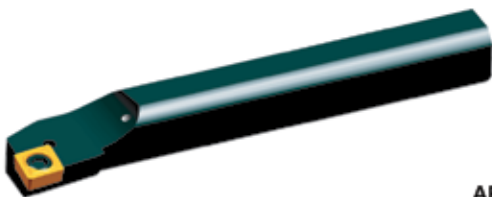

APPLICABLE INSERT

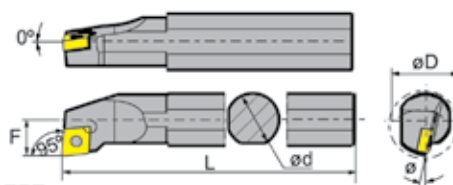

RIGHT HAND SHOWN

S-SCLCR	Ød (Inch)	L (Inch)	ØD (Inch)	F (Inch)	Right Hand Code	Accessories		
						Applicable Insert	Screw Code	Torx® Key Code
A04F-02	0.250	3.14	0.330	0.177	533001	CC_ _21.5_	-	210354
A06J-02	0.375	4.50	0.489	0.275	533002	CC_ _21.5_	-	210354
A08K-02	0.500	4.92	0.629	0.353	533003	CC_ _21.5_	-	210354
A10M-02	0.625	5.90	0.775	0.432	533004	CC_ _21.5_	-	210354
A08K-03	0.500	4.92	0.629	0.353	533006	CC_ _32.5_	302319	210351
A10M-03	0.625	5.90	0.775	0.432	533007	CC_ _32.5_	302319	210351