




Outside Micrometers

With Variable Length Anvils

- Stackable anvils to achieve different measuring ranges
- Graduations: 0.001"
- DIN863
- Light weight and strong hollow pipe frame
- Ratchet stop, carbide tips and zero adjusting wrench
- Supplied with setting standards
- Supplied in fitted storage case

| Range (Inch) | Code |
|--------------|--------|
| 20-24 | 281155 |
| 40-48 | 281160 |
| 48-56 | 281161 |
| 56-64 | 281162 |
| 64-72 | 281163 |
| 72-80 | 281164 |

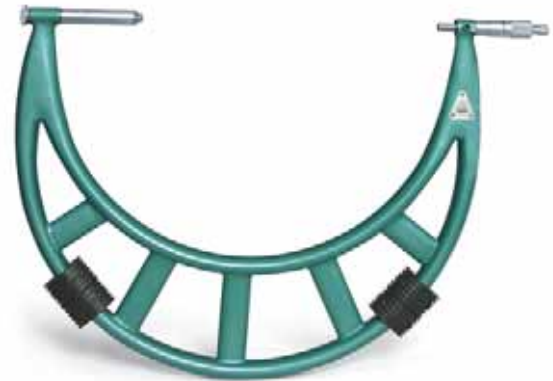


Outside Micrometers

With Interchangeable Anvils

- Interchangeable anvils to achieve different measuring ranges
- With ratchet stop to secure anvils in place consistently
- Graduations: 0.0001" (up to 12"), 0.001" (over 12")
- DIN863
- Micrometers within 12" have casting frame, over 12" have pipe frame
- Ratchet stop, carbide tips and zero adjusting wrench
- Supplied with setting standards
- Supplied in fitted storage case

| Range (Inch) | Code |
|--------------|--------|
| 0-2 | 281180 |
| 0-4 | 281181 |
| 0-6 | 281182 |
| 6-12 | 281186 |
| 12-16 | 281188 |
| 16-20 | 281189 |
| 20-24 | 281190 |
| 24-28 | 281191 |
| 28-32 | 281192 |
| 32-36 | 281193 |
| 36-40 | 281194 |

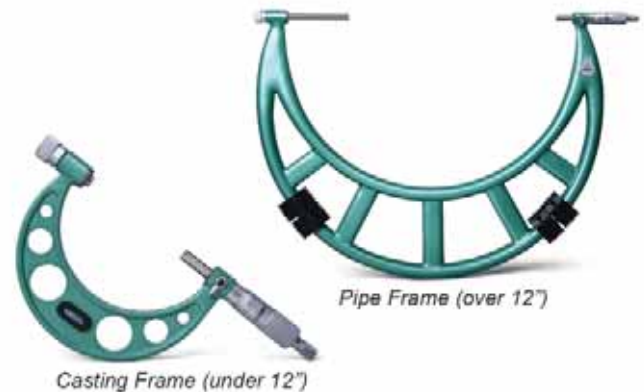

Outside Micrometers

Mitutoyo

- Graduation: 0.0001"
- Carbide faces
- Positive locking clamp
- Ratchet stop or friction thimble for exact, repetitive readings
- Baked-enamel finished frame
- Clear graduations on satin chrome finish
- Micrometers over 1" are supplied with a setting standard
- Supplied in fitted storage case

Inch

| Range (Inch) | Graduation (Inch) | Accuracy (Inch) | Code |
|--------------|-------------------|-----------------|---------|
| 0-1 | 0.0001 | ±0.0001 | 103-260 |
| 1-2 | 0.0001 | ±0.0001 | 103-262 |
| 2-3 | 0.0001 | ±0.0001 | 103-217 |

