



Indicator Extension Rods



Steel

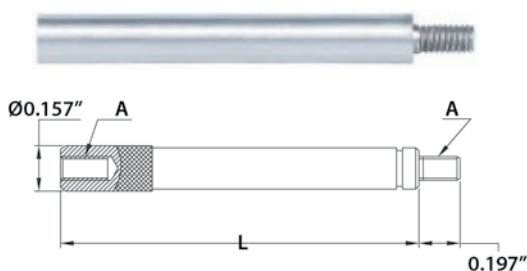


L (Inch)	A Thread	INSIZE No.	Code
1	#4-48UNF	6282-2018	282823
2	#4-48UNF	6282-2019	282824
4	#4-48UNF	6282-2020	282825



L (mm)	INSIZE No.	Code
10	6282-2001	282806
15	6282-2002	282807
20	6282-2003	282808
25	6282-2004	282809
40	6282-2007	282812
50	6282-2009	282814
70	6282-2013	282818
100	6282-2017	282822

INDICATORS

Styli for Dial Test Indicators




For Dial Test Indicator	Material of Contact Point	L (mm)	D (mm)	INSIZE No.	Code
2380-08	Steel	13.5	SØ1	6284-1	282869
2398-08	Carbide	13.5	SØ2	6284-3	282871
2381-08					
2399-08					
2380-02	Carbide	12.5	SØ2	6284-22	282870
2381-02					
2381-021					

Electronic Indicator

Standard Type | Flat Back



- Button function: on/off, inch/mm, zero, data preset, change measuring direction, absolute/incremental measurement
- Switchable high/low frequency measurement mode, high frequency mode is suitable for high speed moving of spindle and has large power consumption, low power consumption in low frequency mode
- Keep preset data in memory after restart
- CR2032 battery, automatic power off (time is adjustable)
- Data output



Range (mm/Inch)	Resolution (mm/Inch)	Accuracy	Hysteresis	Max. measuring force	INSIZE No.	Code
12.7/0.5	0.001/0.00005	5µm	2µm	1.5N	2112-101F	877289
12.7/0.5	0.01/0.0005	20µm	10µm	1.5N	2112-10F	877290