

Outside Micrometers


For Left or Right Hand



Front



Back

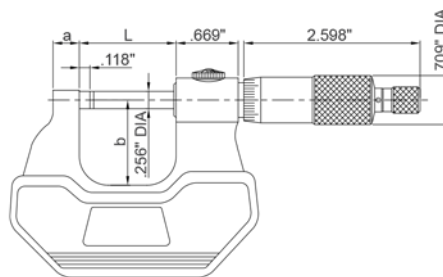

- Graduation: 0.001"
- Graduations on both sides
- Carbide tips
- Ratchet stop
- Micrometers over 1" are supplied with a setting standard
- Supplied in fitted storage case

Range (Inch)	Accuracy (Inch)	L (Inch)	a (Inch)	b (Inch)	INSIZE No.	Code
0-1	±0.00015	1.260	0.236	0.945	3236-1B	816636
1-2	±0.00015	2.244	0.315	1.260	3236-2B	816637

Outside Micrometers


Inch & Metric



816566

816564

* INSPECTION CERTIFICATE

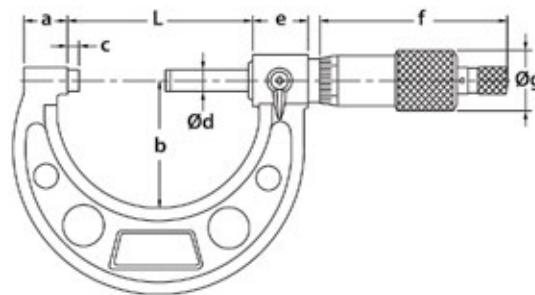

- Graduation: Inch 0.0001"; Metric 0.01mm
- Ratchet stop
- Carbide tips
- Micrometers over 1"/25mm are supplied with a setting standard
- Supplied in fitted storage case

Inch

Range (Inch)	Accuracy (Inch)	L (Inch)	a (Inch)	b (Inch)	c (Inch)	Ød (Inch)	e (Inch)	f (Inch)	Øg (Inch)	INSIZE No.	Code
0-1	±0.00015	1.260	0.354	1.102	0.118	0.256	0.669	2.598	0.709	*3203-1A	816564
1-2	±0.00015	2.244	0.551	1.496	0.118	0.256	0.669	2.598	0.709	*3203-2A	816566
2-3	±0.00020	3.228	0.591	1.929	0.118	0.256	0.669	2.598	0.709	*3203-3A	816568
3-4	±0.00020	4.213	0.591	2.362	0.118	0.256	0.669	2.598	0.709	*3203-4A	816570
4-5	±0.00025	5.236	0.650	2.874	0.118	0.256	0.669	2.598	0.709	*3203-5A	816572
5-6	±0.00025	6.220	0.650	3.346	0.118	0.256	0.669	2.598	0.709	*3203-6A	816574
6-7	±0.00030	7.205	0.764	4.094	0.118	0.256	0.669	2.598	0.709	3203-7A	816576
7-8	±0.00030	8.228	0.764	4.606	0.118	0.256	0.669	2.598	0.709	3203-8A	816578
8-9	±0.00030	9.213	0.764	5.118	0.118	0.256	0.669	2.598	0.709	3203-9A	816580
9-10	±0.00030	10.236	0.764	5.591	0.118	0.256	0.669	2.598	0.709	3203-10A	816582
10-11	±0.00035	11.220	0.764	6.102	0.118	0.256	0.669	2.598	0.709	3203-11A	816584
11-12	±0.00035	12.205	0.764	6.614	0.118	0.256	0.669	2.598	0.709	3203-12A	816586

Friction Thimble

Range (Inch)	Accuracy (Inch)	L (Inch)	a (Inch)	b (Inch)	INSIZE No.	Code
0-1	±0.0001	1.26	0.354	1.102	*3203-1FA	816565
1-2	±0.0001	2.244	0.551	1.496	*3203-2FA	877304
2-3	±0.0001	2.244	0.591	1.929	*3203-3FA	877305