


Boring Bars - For Boring and Chamfering

High Speed Steel and Carbide

Single Piece Style ASB

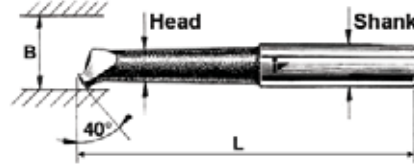

HSS Regular Length

Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code	Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code
0000	3.5	8	45	500001	0	7	8	56	500004
000	4.5	8	49	500002	1	11	8	65	500005
00	5.5	8	52	500003	2	13	8	72	500006


HSS Long Length

Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code	Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code
0000	3.5	8	52	500020	0	7	8	69	500023
000	4.5	8	58	500021	1	11	8	82	500024
00	5.5	8	64	500022	2	13	8	100	500025

Carbide

Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code	Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code
00	5.5	8	64	500030	1	11	8	82	500032
0	7	8	69	500031	2	13	8	72	500033

2 Piece Style ASB

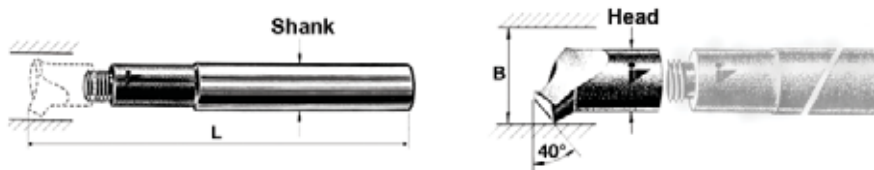

Head and shank sold separately

HSS Head

Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code	Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code
3	17	12	200	500007	8	34	20	330	500012
4	21	13	230	500008	9	37	22	360	500013
5	24	15	260	500009	10	42	25	390	500014
6	28	17	280	500010	11	50	30	430	500015
7	31	19	310	500011	12	60	35	500	500016