

Arbor Spacers with Keyway

0.062" to 3.000" Thickness

Inside Diameter 1-1/2"

Thickness (Inch)	Code	Thickness (Inch)	Code	Thickness (Inch)	Code	Thickness (Inch)	Code
1/16	203361	5/16	203365	5/8	203369	1-1/4	203373
1/8	203362	3/8	203366	3/4	203370	2	203375
3/16	203363	7/16	203367	7/8	203371	3	203376
1/4	203364	1/2	203368	1	203372		


Inside Diameter 2"

Thickness (Inch)	Code	Thickness (Inch)	Code	Thickness (Inch)	Code	Thickness (Inch)	Code
1/16	203381	5/16	203385	5/8	203389	1-1/4	203393
1/8	203382	3/8	203386	3/4	203390	1-1/2	203394
3/16	203383	7/16	203387	7/8	203391	2	203395
1/4	203384	1/2	203388	1	203392	3	203396

Tool Clamping Fixtures

Multiple use for Tool Shank ISO, DIN 69871, CAT and BT-MAS

- Easy access for combined assembly of cutting tool and pull stud
- Head fixture can be set in five positions: vertical, horizontal and 45° (left and right)
- Efficiently designed for maximum protection of tool holder
- Enables strong gripping power of cutting tools
- Compact design - can be mounted on work table or tool cart

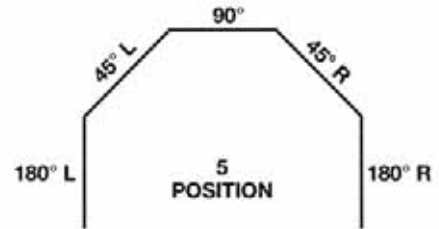

Taper	Code
Tool clamp #40 rotary	827695
Tool clamp #50 rotary	827696
Tool clamp #40 fixed	827697
Tool clamp #50 fixed	827698

Precision Test Bars

CAT40, CAT50, BT40, BT50

- Test bars are calibrated and certified
- Bar diameters are concentric to taper within 0.0002"

Taper	A (Inch)	B (Inch)	Code
CAT40	2	10	209500
CAT50	2	12	209501
BT40	2	10	209502
BT50	2	12	209503

