


Threading Bars - For 60° Threading

High Speed Steel and Carbide

Single Piece Style GWS



HSS Regular Length

Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code	Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code
000	5	8	46	500102	1	11	8	56	500105
00	6.5	8	50	500103	2	13	8	64	500106
0	9	8	52	500104					


HSS Long Length

Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code	Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code
00	6.5	8	59	500122	1	11	8	70	500124
0	9	8	64	500123	2	13	8	80	500125

Carbide

Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code	Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code
000	5	8	46	500129	1	11	8	70	500132
00	6.5	8	50	500130	2	13	8	80	500133
0	9	8	64	500131					

2 Piece Style GWS

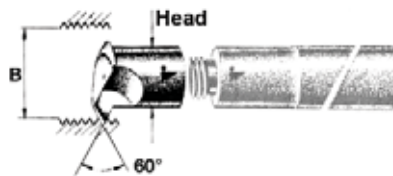

Head and shank sold separately

HSS Head

Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code	Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	L Length (mm)	Code
3	17	12	200	500107	8	34	20	330	500112
4	21	13	230	500108	9	37	22	360	500113
5	24	15	260	500109	10	42	25	390	500114
6	28	17	280	500110	11	50	30	430	500115
7	31	19	310	500111					