


## Threading Bars – 60° Threading (continued)



High Speed Steel & Carbide

2 Piece Style GWS

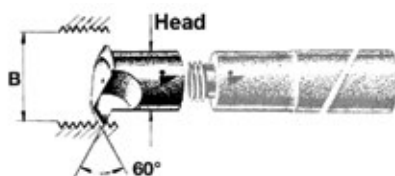

Head and shank sold separately


Tool No.	B Minimum Bore (mm)	S Shank Diameter (mm)	HSS Head		Carbide Head		Shank
			L Length (mm)	Code	L Length (mm)	Code	Code
3	17	10	–	–	–	–	500202
3	17	12	–	–	–	–	500203
4	21	13	230	500108	230	500135	500204
5	24	15	260	500109	260	500136	500205
6	28	17	280	500110	280	500137	500206
7	31	19	310	500111	310	500138	500207
8	34	20	330	500112	330	500139	500208
9	37	22	360	500113	360	500140	500209
10	42	25	390	500114	390	500141	500210
11	50	30	430	500115	430	500142	500211

## Grooving Bars – Thread Relieving Tools



High Speed Steel

Single Piece Style GRS

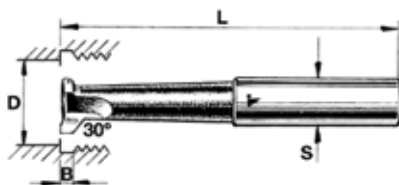

Tool No.	D Minimum Bore (mm)	B Groove Width (mm)	S Shank Diameter (mm)	L Length (mm)	Code	Tool No.	D Minimum Bore (mm)	B Groove Width (mm)	S Shank Diameter (mm)	L Length (mm)	Code
00	6	1.5	8	50	500173	1	11	2	8	55	500175
0	8	1.8	8	50	500174	2	14	2	8	64	500176