


Live Centers - Super Precision

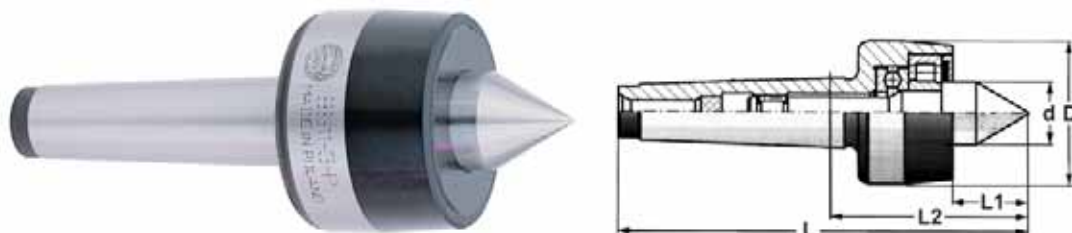

- Made of hardened steel and ground for high accuracy
- $\pm 0.0002''$ total indicator runout
- Three precision high quality bearings are protected by combination steel shield and neoprene seal
- Live centers are lubricated with a special grease and do not require any additional lubrication

Morse Taper	Maximum Weight of Workpiece (lbs)	D (Inch)	d (Inch)	L (Inch)	L1 (Inch)	L2 (Inch)	Maximum RPM	Weight (lbs)	Accuracy (Inch)	Code
1	300	1.50	0.59	4.07	0.70	1.97	5000	0.64	0.0002	826287
2	650	1.57	0.70	4.74	0.87	2.22	5000	1.00	0.0001	826288
3	1300	2.20	0.98	6.14	1.12	2.95	4000	2.13	0.0001	826289
4	2500	2.52	1.10	7.24	1.24	3.21	3000	3.85	0.0001	826290
5	5300	3.35	1.61	9.33	1.77	4.23	2500	8.37	0.0002	826291
6	11000	5.12	2.48	13.13	2.52	5.96	2000	26.43	0.0002	826292

Live Centers

Value Line



Morse Taper	Body Diameter (Inch)	Point Diameter (Inch)	Live Center Length (Inch)	Overall Length (Inch)	Code
2	1.70	0.82	0.94	5.37	105022
3	2.28	0.94	0.98	6.02	105023
4	2.48	1.08	1.16	7.30	105024
5	2.95	1.42	1.50	9.40	105025