

Electronic Three Point Internal Micrometers



Coolant Proof

- Resolution: 0.00005"/0.001mm
- Coolant/dust proof, IP54 Ingress protection level
- Buttons: on/off, set, inch/mm, ABS/INC
- Data output
- Battery LR44
- Auto power off
- Ratchet stop
- Supplied with setting rings and extension rods
- Supplied in fitted storage case




OPTIONAL ACCESSORIES:
SPC cable, Setting ring, Micrometer stand, clamp



282305

Type A
Steel Points

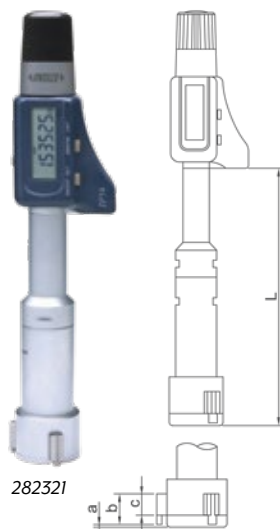


282321

Type B
Carbide Points



282367

Type C
Carbide Points

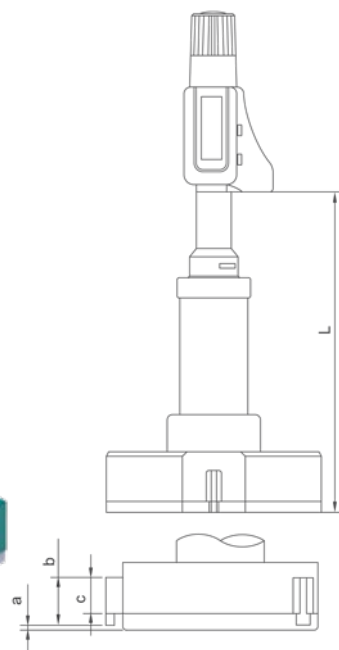

Set
282331

Individual

Range (Inch/mm)	Accuracy (Inch)	Type	Ø Setting Ring (Inch)	Extension Rod (Inch)	L (Inch)	a (Inch)	b (Inch)	c (Inch)	INSIZE No.	Code
0.35-0.425/9-11	0.00015	A	0.35	4	2.18	0.059	0.098	-	3127-E0425	816638
0.425-0.5/11-13	0.00015	A	0.50	4	2.18	0.059	0.098	-	3127-E05	282305
0.5-0.65/13-17	0.00015	B	0.65	6	3.20	0.020	0.236	0.177	3127-E065	282317
0.65-0.8/17-20	0.00015	B	0.65	6	3.20	0.020	0.236	0.177	3127-E08	282318
0.8-1/20-25	0.00015	B	1.00	6	3.60	0.020	0.315	0.236	3127-E1	282319
1-1.2/25-30	0.00015	B	1.00	6	3.60	0.020	0.315	0.236	3127-E112	282320
1.2-1.6/30-40	0.00015	B	1.60	6	3.88	0.020	0.551	0.472	3127-E16	282321
1.6-2/40-51	0.00020	B	1.60	6	3.88	0.020	0.551	0.472	3127-E2	282322
2-2.5/51-63	0.00020	C	2.50	6	4.56	0.020	0.689	0.571	3127-E25	282323
2.5-3/63-76	0.00020	C	2.50	6	4.56	0.020	0.689	0.571	3127-E3	282324
3-3.5/76-89	0.00020	C	3.50	6	4.56	0.020	0.689	0.571	3127-E35	282325
3.5-4/89-101	0.00020	C	3.50	6	4.56	0.020	0.689	0.571	3127-E4	282326
4-5/101-127	0.00025	C	-	6	6.00	0.035	1.142	0.984	3127-E5	282367
5-6/127-152	0.00025	C	-	6	6.00	0.035	1.142	0.984	3127-E6	282368

Supplied with a Manufacturer Inspection Certificate

Sets

Range (Inch/mm)	Micrometers Included (Inch/mm Range)	Ø Setting Ring (Inch)	Extension Rod (Inch)	INSIZE No.	Code
0.275-0.5/7-13	0.275-0.35/7-9, 0.35-0.425/9-11, 0.425-0.5/11-13	0.275, 0.35, 0.5	4	3127-E053	282306
0.5-0.8/13-20	0.5-0.65/13-17, 0.65-0.8/17-20	0.65	6	3127-E082	282330
0.8-2/20-51	0.8-1/20-25, 1-1.2/25-30, 1.2-1.6/30-40, 1.6-2/40-51	1, 1.6	6	3127-E24	282331
2-4/51-101	2-2.5/51-63, 2.5-3/63.76, 3-3.5/76-89, 3.5-4/89-101	2.5, 3.5	6	3127-E44	282332

Supplied with a Manufacturer Inspection Certificate