

Digimatic Micrometer



Coolant Proof IP65




- Resolution: 0.00005"/0.001mm
- Accuracy: ± 0.00005 "
- Coolant proof, IP65 Ingress protection level
- Faster measurement with 2mm per revolution instead of the standard 0.5mm
- A patented ratchet thimble mechanism helps ensure repeatability
- A function lock helps prevent error
- Certificate of inspection provided
- Supplied in fitted storage case

Range (Inch)	Code
0-1	293-180

Electronic Outside Micrometers



Spherical Anvil to measure tube thickness

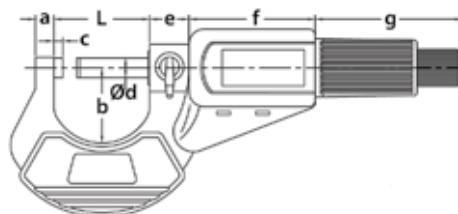


- Resolution: 0.00005"/0.001mm
- Button functions: on/off, set, inch/mm, ABS/INC
- Auto power off
- Battery LR44
- Carbide tips
- Friction thimble
- Spherical anvil included allows tube thickness measurements
- Micrometers over 0-1"/0-25mm are supplied with a setting standard
- Supplied in fitted storage case

Range (Inch/mm)	Accuracy (Inch)	L (Inch)	a (Inch)	b (Inch)	c (Inch)	Ød (Inch)	e (Inch)	f (Inch)	g (Inch)	INSIZE No.	Code
0-1/0-25	± 0.00010	1.260	0.236	1.083	0.118	0.256	0.551	1.811	1.890	3109-25E	816500
1-2/25-50	± 0.00015	2.244	0.315	1.457	0.118	0.256	0.551	1.811	1.890	3109-50E	816502
2-3/50-75	± 0.00015	3.228	0.315	1.969	0.118	0.256	0.551	1.811	1.890	3109-75E	816504
3-4/75-100	± 0.00015	4.213	0.394	2.402	0.118	0.256	0.551	1.811	1.890	3109-100E	816506

Outside Micrometers



With Counter

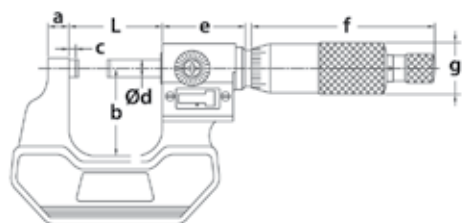

- Counter resolution: 0.001"
- Thimble graduation: 0.0001"
- Ratchet stop and carbide tips
- Micrometers over 1"/25mm are supplied with a setting standard
- Supplied in fitted storage case

Range (Inch)	Accuracy (Inch)	L (Inch)	a (Inch)	b (Inch)	c (Inch)	Ød (Inch)	e (Inch)	f (Inch)	Øg (Inch)	INSIZE No.	Code
0-1	± 0.00015	1.260	0.236	1.024	0.138	0.256	1.181	2.598	0.709	3400-1	280933
1-2	± 0.00015	2.244	0.315	1.260	0.138	0.256	1.181	2.598	0.709	3400-2	280934
2-3	± 0.00020	3.228	0.315	1.752	0.138	0.256	1.181	2.598	0.709	3400-3	280935
3-4	± 0.00020	4.213	0.315	2.244	0.138	0.256	1.181	2.598	0.709	3400-4	280936