


Boring Bar Blanks

CAT V-Flange Shanks

- Constructed of high quality alloy steel - SAE8620/20MnCR5
- 58+/-2 HRC shank
- 20-30 HRC blank part
- Taper shank ground to AT3 accuracy or better

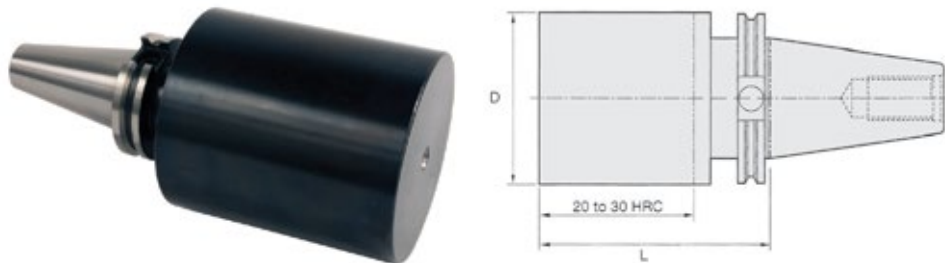


CAT40				CAT50			
D (Inch)	L (Inch)	Weight (lbs)	Code	D (Inch)	L (Inch)	Weight (lbs)	Code
4.00	12.00	39.89	310933	4.00	12.00	44.56	312023
4.00	6.00	18.55	310934	4.00	6.00	23.23	312024
-	-	-	-	6.00	6.00	43.50	312025

Morse Taper Adapters



- Coolant through spindle
- Taper shank ground to AT3 accuracy or better

CAT40 & CAT50

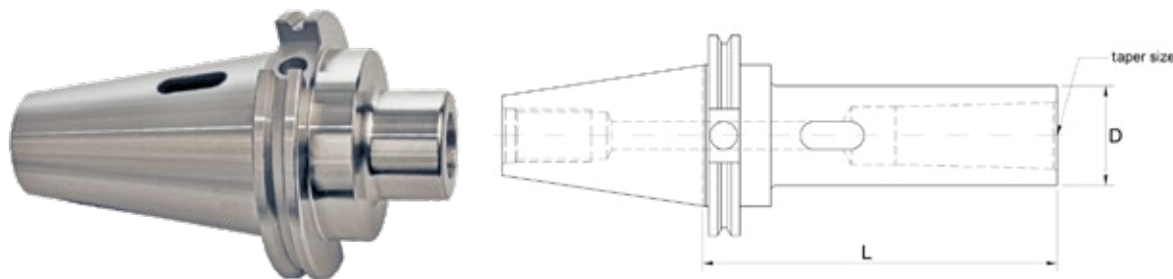

- MT - CAT Form A
- CAT40 draw bar threads: 5/8"-11
- CAT50 draw bar threads: 1"-8

Taper Size	CAT40				CAT50			
	D (Inch)	L (Inch)	Weight (lbs)	Code	D (Inch)	L (Inch)	Weight (lbs)	Code
MT1	0.98	1.75	2.21	310984	2.75	1.75	6.90	312068
MT2	1.26	2.44	2.30	310985	2.75	2.00	7.43	312069
MT3	1.57	3.00	2.49	310986	1.57	2.50	6.73	312070
MT4	1.89	3.88	2.86	310987	1.89	3.38	6.90	312071
MT5	-	-	-	-	2.75	3.75	7.55	312072