



Shell Mill Adapters

- Taper to pilot runout: <0.0002"
- Taper shank ground to AT3 accuracy or better
- H6 pilot tolerance
- AD+B coolant through spindle and flange
- Balanced by design
- Provided with a non-coolant arbor screw (coolant arbor screws sold separately)

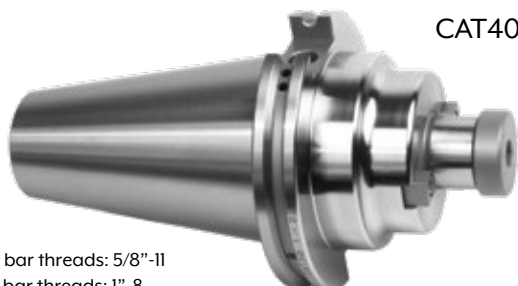

CAT40 & CAT50

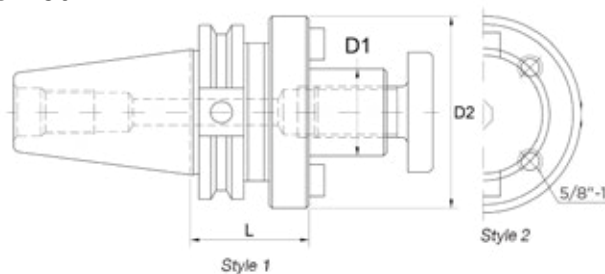

- CAT40 draw bar threads: 5/8"-11
- CAT50 draw bar threads: 1"-8

D1 (Inch)	D2 (Inch)	L (Inch)	Clamp Screw Reference	Wrench Size (Allen Key)	Drive Key Size (Inch)	CAT40		CAT50	
						Weight (lbs)	Code	Weight (lbs)	Code
1/2	1.75	1.38	301761	3/16	1/4	2.27	310989	-	-
1/2	2.75	1.38	301761	3/16	1/4	-	-	6.82	312074
1/2	1.44	3.50	301761	3/16	1/4	-	-	7.54	312075
3/4	2.75	1.38	301741	1/4	5/16	-	-	6.88	312076
3/4	1.75	1.38	301741	1/4	5/16	2.21	310990	-	-
3/4	1.75	3.50	301741	1/4	5/16	3.80	310991	8.34	312077
3/4	1.75	6.00	301741	1/4	5/16	-	-	9.70	312078
1	2.19	2.06	301742	5/16	3/8	3.10	310992	7.37	312079
1	2.19	4.00	301742	5/16	3/8	4.30	310993	-	-
1	2.40	4.00	301742	5/16	3/8	-	-	9.97	312080
1	2.40	6.00	301742	5/16	3/8	-	-	12.46	312081
1-1/4	2.75	2.12	301743	5/16	1/2	4.00	310994	7.18	312082
1-1/4	2.75	4.00	301743	5/16	1/2	5.00	310995	10.31	312083
1-1/4	2.75	6.00	301743	5/16	1/2	-	-	11.35	312084
1-1/2	3.38	2.41	301762	3/8	5/8	5.01	310996	9.71	312085
1-1/2	3.38	4.00	301762	3/8	5/8	5.01	310997	12.27	312086
1-1/2	3.38	6.00	301762	3/8	5/8	-	-	13.40	312087
2	4.37	2.40	301763	3/8	3/4	-	-	12.50	* 301770
2-1/2	4.88	2.40	-	-	1	-	-	19.00	301771

* Non-coolant through

MILLING TOOLS