


Live Center Sets

With 7 Interchangeable Points

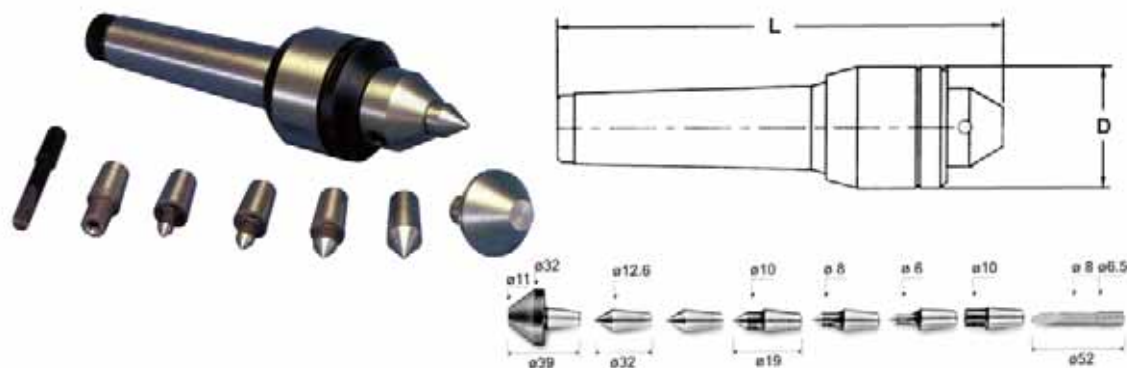

- Construction consists of double rows of ball bearings and thrust bearings
- Ground for higher accuracy
- 60° point

SET INCLUDES:


- 5 male centers
- 1 female center
- 1 bull center
- 1 extractor
- Supplied In fitted storage case

Morse Taper	D Outside Diameter (Inch)	L Length (Inch)	Code
2	1.57	5.20	120122
3	1.81	6.22	120123
4	1.81	7.08	120124
5	2.50	9.21	120125

Live Centers - Econo-Tri-Bearing



Standard Point

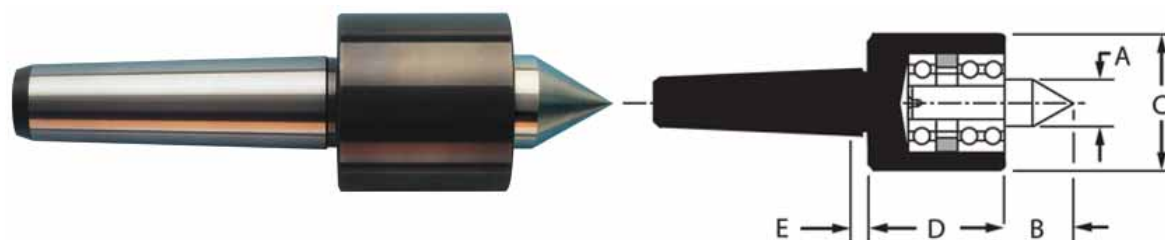

- Accuracy guaranteed to $\pm 0.0002''$
- Three rows of bearings
- Points are through-hardened to 61-63 HRC
- Sealed bearings lubricated for life protects against contaminants and coolant

Morse Taper	A (Inch)	B (Inch)	C (Inch)	D (Inch)	E (Inch)	Maximum RPM	Workpiece Weight (lbs)	Code
2	9/16	13/16	1-5/8	1-5/8	1/4	2500	300	100365
3	13/16	1	2	1-15/16	1/4	2500	500	100366
4	1	1-1/4	2-3/8	2-1/4	1/4	2500	1100	100367
5	1	1-1/4	2-3/8	2-1/4	1/4	2500	1100	100368