


Dial Indicators



Inch

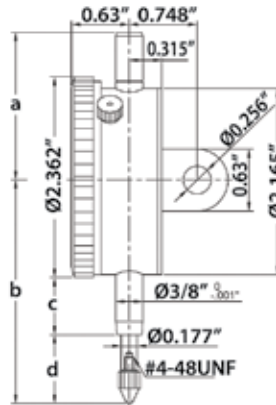

- Meets ASME B89.110M-2001 standards
- Lug back
- Bezel locking clamp and limit pointers
- Contact point thread: #4-48UNF
- Supplied in fitted storage case

Specifications				
Range (Inch)	a (Inch)	b (Inch)	c (Inch)	d (Inch)
0.25	1.811	2.953	0.787	0.984
0.5	1.811	2.953	0.787	0.984
1	1.811	3.346	0.787	1.375
2	4.370	5.472	1.969	2.323

OPTIONAL ACCESSORIES: Contact points, Flat back

Range (Inch)	Graduation (Inch)	First 2.5 Rev Accuracy (Inch)	Overall Accuracy (Inch)	Range per Rev (Inch)	Dial Reading	INSIZE No.	Code
0.25	0.001	±0.001	±0.001	0.1	0-100	2307-025	282705
0.5	0.001	±0.001	±0.002	0.1	0-100	2307-05	816156
1	0.001	±0.001	±0.002	0.1	0-100	2307-1	816158
2	0.001	±0.001	±0.004	0.1	0-100	2307-2	816160
0.25	0.0005	±0.0005	±0.0015	0.05	0-50	2307-0255	282707
0.5	0.0005	±0.0005	±0.0015	0.05	0-50	2307-055	282708
1	0.0005	±0.0005	±0.0020	0.05	0-50	2307-105	282709
2	0.0005	±0.0005	±0.0020	0.05	0-50	2307-205	282710

Dial Indicator

- Lug back




Range (Inch)	Graduation (Inch)	Bezel Diameter (Inch)	Reading	Code
0-1	0.001	2-3/16	0-100-0	841021

Large Face Dial Indicators



- Meets ASME B89.110M-2001 standards
- Lug back
- Bezel locking clamp and limit pointers
- Contact point thread: #4-48UNF
- Supplied in fitted storage case

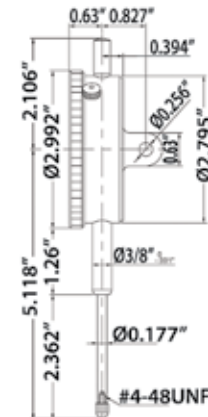

OPTIONAL ACCESSORIES: Contact points

Range (Inch)	Graduation (Inch)	First 2.5 Rev Accuracy (Inch)	Overall Accuracy (Inch)	Range per Rev (Inch)	Dial Reading	INSIZE No.	Code
1.5	0.001	±0.001	±0.004	0.1	0-100	*2312-15	282711
2	0.001	±0.001	±0.004	0.1	0-100	2312-2	282712