

Dial Indicator

Metric



- Lug back
- Hysteresis: 0.02mm
- Bezel locking clamp and limit pointers
- Contact point thread: M2.5 x 0.45
- Supplied in fitted storage case

OPTIONAL ACCESSORIES: Contact points, Flat back

Range (mm)	Graduation (mm)	Accuracy (mm)	Range per Rev (mm)	Dial Reading	INSIZE No.	Code
25	0.1	0.06	10	0-10	2318-25	816164






Long Stroke Dial Indicators



- Graduation: 0.001"
- Lug back
- Bezel locking clamp and limit pointers
- Contact point thread: #4-48UNF
- Supplied in fitted storage case

OPTIONAL ACCESSORIES: Contact points, Flat back

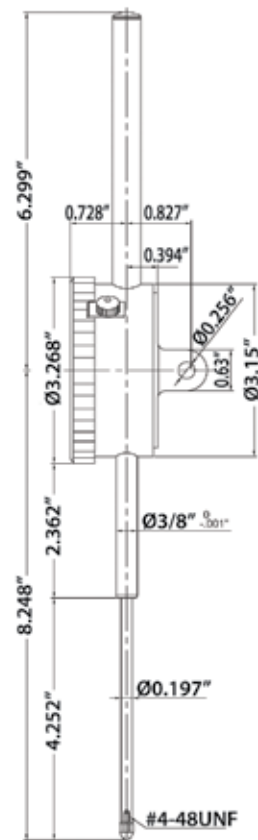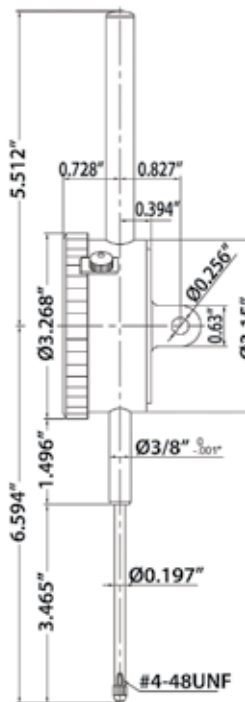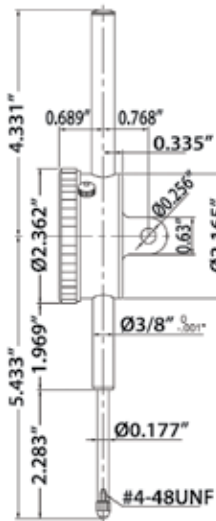

Range (Inch)	First 2.5 Rev Accuracy (Inch)	Overall Accuracy (Inch)	Range per Rev (Inch)	Dial Reading	INSIZE No.	Code
2	±0.001	±0.004	0.1	0-100	*2326-2	282715
3	±0.001	±0.005	0.1	0-100	2326-3	282717
4	±0.001	±0.005	0.1	0-100	2326-4	282718

NOTE: 282717 and 282718 can only be used vertically