


Live Centers



High Speed Steel – Main Line | Types N, V, L, A, D-AN (continued)

Type V – Extended Point 60°

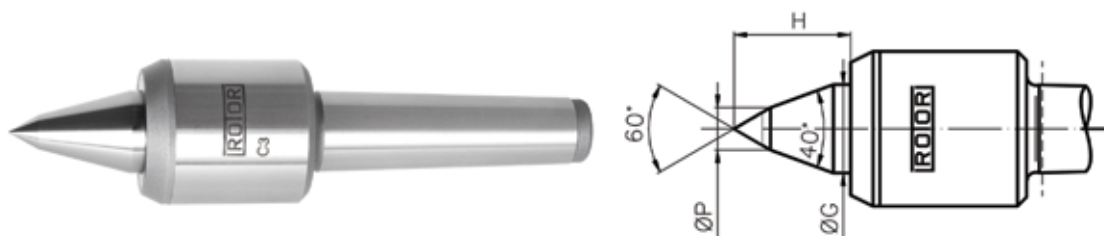

For body dimensions see Main-Line: Type N

Morse Taper	Model	ØG (Inch)	H (Inch)	ØP (Inch)	Workpiece Maximum (lbs)	Maximum RPM	Code
MT1	1 ST	0.47	0.79	0.26	190	8000	100151
MT2	2 ST	0.63	1.02	0.35	390	7000	100152
MT2	2 SU	0.94	1.50	0.39	460	5800	100162
MT3	3 SM	0.63	1.02	0.35	680	7000	100173
MT3	3 ST	0.94	1.50	0.39	970	5800	100153
MT3	3 SU	1.18	1.89	0.55	1450	4800	100163
MT4	4 SM	0.94	1.50	0.39	1150	5800	100174
MT4	4 ST	1.18	1.89	0.55	1900	4800	100154
MT4	4 SU	1.57	2.52	0.59	2400	4000	100164
MT5	5 SM	1.18	1.89	0.55	2300	4500	100175
MT5	5 ST	1.57	2.52	0.59	3200	4000	100155
MT5	5 SU	1.97	3.15	0.71	5300	2800	100165
MT6	6 ST	1.97	3.23	0.71	6800	2800	100156

Type L – Slim Extended Point 60°



For body dimensions see Main-Line: Type N

Morse Taper	Model	ØD (Inch)	E (Inch)	H (Inch)	ØP (Inch)	Workpiece Maximum (lbs)	Maximum RPM	Code
MT2	2 ST	0.63	1.14	0.47	0.23	220	7000	100180
MT3	3 SM	0.63	1.14	0.47	0.23	220	7000	100181
MT3	3 ST	0.94	1.65	0.63	0.31	441	5800	100182
MT4	4 SM	0.94	1.65	0.63	0.31	441	5800	100183
MT4	4 ST	1.18	2.01	0.75	0.39	772	4800	100184
MT5	5 SM	1.18	2.01	0.75	0.39	772	4800	100185
MT5	5 ST	1.57	2.56	0.87	0.46	1190	4000	100186