

# Electronic Indicators




Standard



- Meets ASME B89.1.10M-2001 standards
- Accuracy:  $\pm 0.0015''$
- Hysteresis: 0.0005"
- Button function: on/off, inch/mm, zero
- Auto power off
- Battery CR2032
- Data output
- Lug back
- Contact point thread #4-48UNF
- Supplied in fitted storage case

OPTIONAL ACCESSORIES:

- SPC cable
- Contact points
- Flat back

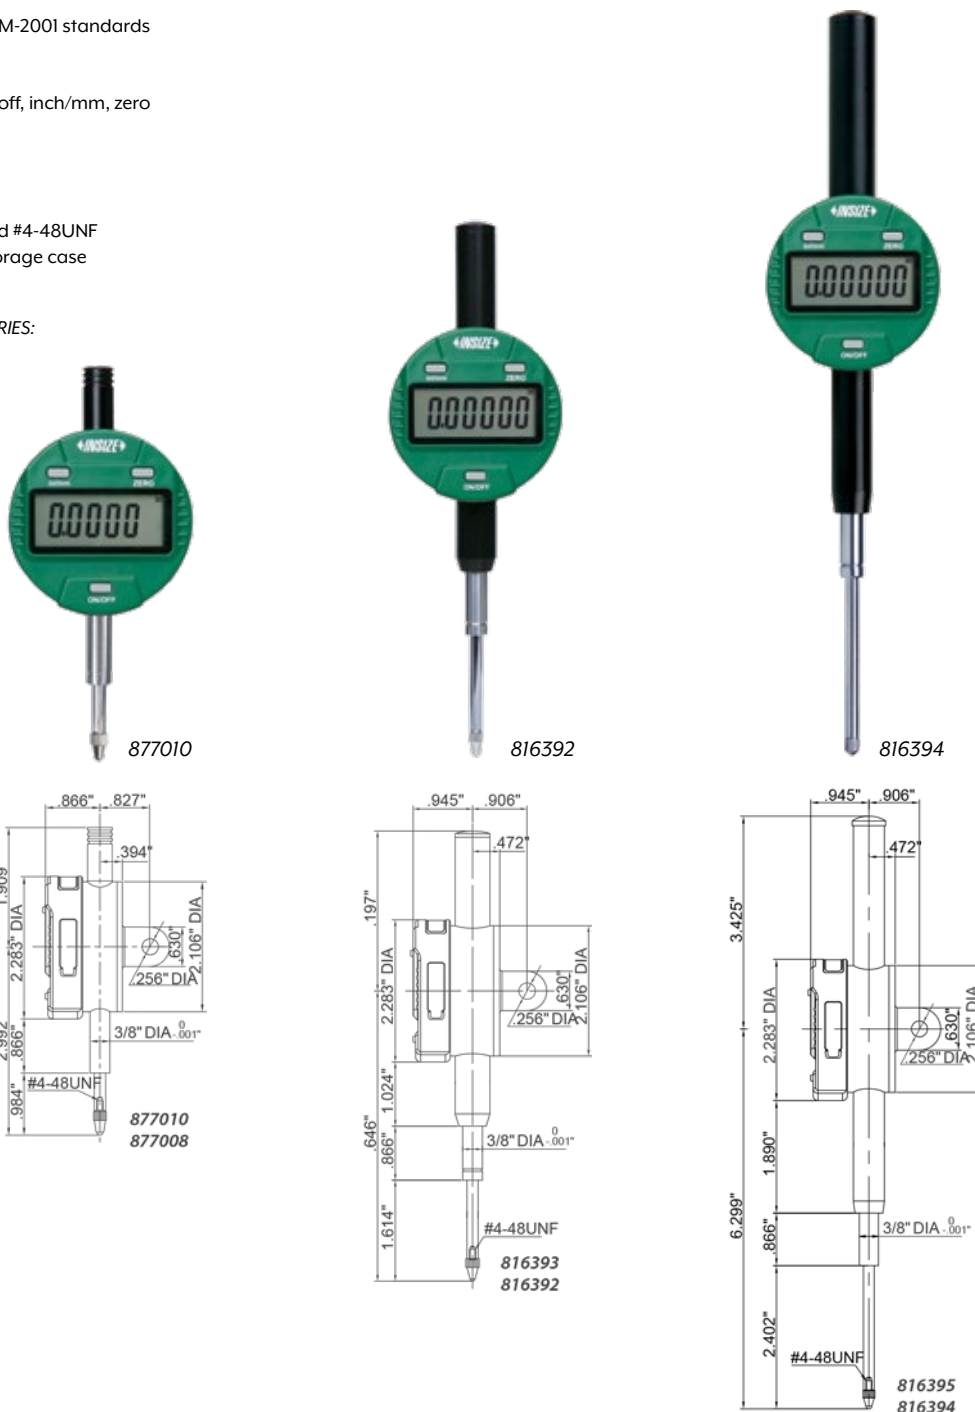

Resolution: 0.00005"/0.001mm

Range (Inch/mm)	INSIZE No.	Code
0.5/12.7	2112-10IE	877008
1/25.4	2112-25IE	816392
2/50.8	2112-50IE	816394

Resolution: 0.0005"/0.01mm

Range (Inch/mm)	INSIZE No.	Code
0.5/12.7	2112-10E	877010
1/25.4	2112-25E	816393
2/50.8	2112-50E	816395

INDICATORS