


Threaded Spring Plungers

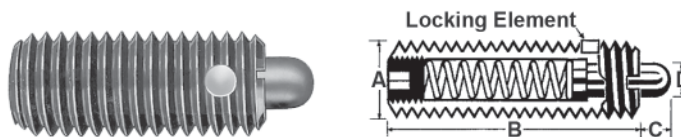

- Plungers may be ordered with or without the locking element (Without element is the same price, but is considered "special" and cannot be returned)
- It is recommended using without the locking element for applications in aluminum
- Steel noses are case hardened for wear resistance without brittleness
- Delrin noses prevent marking of aluminum, brass or other soft materials
- Steel body with black oxide finish

Head Threaded Black Oxide Steel Nose

End Pressures Start (lbs)	End Pressures 1/2 (lbs)	End Pressures Full (lbs)	A Thread	B (Inch)	C (Inch)	D +.000 - .002	Net Weight per 100 (lbs)	Code
1.5	3.0	4.5	#6-32	17/32	0.062	0.046	1/2	718600
1.0	1.3	1.6	#6-32	3/8	0.062	0.046	1/2	718601
2.7	5.0	7.3	#8-32	5/8	0.093	0.070	1/2	718602
2.9	7.0	11.1	#10-32	3/4	0.125	0.093	1/2	718603
3.0	8.0	13.0	1/4-20	1	0.187	0.119	1	718604
3.0	8.0	13.0	1/4-28	1	0.187	0.119	1	718605
2.0	5.5	9.0	1/4-20	3/4	0.125	0.119	1	718606
3.0	9.0	15.0	5/16-18	1	0.187	0.135	2	718607
5.5	10.0	14.5	3/8-16	1-1/8	0.187	0.186	2	718608
6.6	12.0	17.4	1/2-13	1-1/4	0.250	0.248	5	718609
10.5	18.0	25.5	5/8-11	1-1/2	0.312	0.310	8	718610
6.7	22.0	37.3	3/4-10	1-3/4	0.312	0.374	14	718611
16.0	42.0	68.0	1-8	2-13/32	0.500	0.499	34	718612

* Conforms to TCMAI/NIJFCM standards

Brown Delrin Nose

End Pressures Start (lbs)	End Pressures 1/2 (lbs)	End Pressures Full (lbs)	A Thread	B (Inch)	C (Inch)	D +.000 - .002	Net Weight per 100 (lbs)	Code
2.7	5.0	7.3	#8-32	5/8	0.093	0.070	1/2	718613
2.9	7.0	11.1	#10-32	3/4	0.125	0.093	1/2	718614
3.0	8.0	13.0	1/4-20	1	0.187	0.119	1	718615
3.0	8.0	13.0	1/4-28	1	0.187	0.119	1	718616
3.0	9.0	15.0	5/16-18	1	0.187	0.135	1-1/2	718617
5.5	10.0	14.5	3/8-16	1-1/8	0.187	0.186	2	718618
6.6	12.0	17.4	1/2-13	1-1/4	0.250	0.248	4	718619
10.5	18.0	25.5	5/8-11	1-1/2	0.312	0.310	7	718620

* Conforms to TCMAI/NIJFCM standards