


Boring Bars

Adjustable Boring Bars- Micro-Size

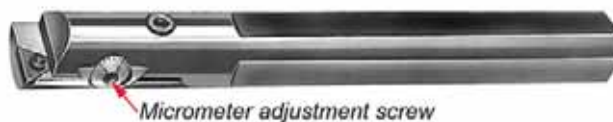

- For use on CNC and conventional mills and lathes
- Can be precision adjusted while tool is in machine
- 0.002" graduation adjustment

HOLDERS

Minimum Bore (Inch)	Maximum Bore (Inch)	Shank Diameter or Style	Overall Length (Inch)	Maximum Depth of Cut (Inch)	Insert Size I/C (Inch)	Code
3/4	15/16	5/8"	5-1/4	3-1/8	1/4	311405
3/4	15/16	R-8	7-3/8	3-1/8	1/4	311406
15/16	1-3/16	3/4"	6-5/16	4-1/8	3/8	311407
15/16	1-3/16	R-8	8-3/8	4-1/8	3/8	311408
1-3/16	1-5/8	1"	8-1/4	5-1/8	3/8	311409
1-3/16	1-5/8	R-8	9-3/8	5-1/8	3/8	311410
1-7/16	2-3/8	1-1/4"	10-5/16	6-1/4	3/8	311411
1-7/16	2-3/8	R-8	10-1/2	6-1/4	3/8	311412

Applicable Carbide Inserts

Grade C2

Radius (Inch)	I/C (Inch)	Thickness (Inch)	Code	Radius (Inch)	I/C (Inch)	Thickness (Inch)	Code
1/32	1/4	3/32	210355	1/32	3/8	1/8	210360
1/64	3/8	1/8	210359				

Grade C5

Radius (Inch)	I/C (Inch)	Thickness (Inch)	Code	Radius (Inch)	I/C (Inch)	Thickness (Inch)	Code
0.008	1/4	3/32	210356	1/32	3/8	1/8	210362
1/64	3/8	1/8	210361				

TiN Coated

Radius (Inch)	I/C (Inch)	Thickness (Inch)	Code	Radius (Inch)	I/C (Inch)	Thickness (Inch)	Code
0.008	1/4	3/32	210357	1/64	3/8	1/8	210363
1/64	1/4	3/32	577463	1/32	3/8	1/8	210364
1/32	1/4	3/32	210358				

Replacement Parts

Description	Code
Flat head cap screw for 3/8" I/C	577455