


## Electronic Outside Micrometers



Coolant Proof

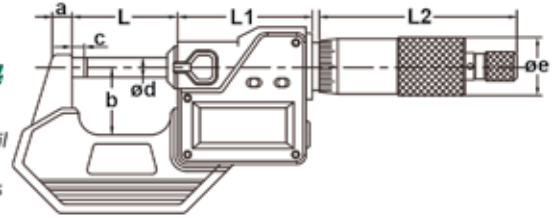

OPTIONAL ACCESSORY: SPC cable

- Resolution: 0.00005"/0.001mm [exceptions: 280848 (3101-275E) and 280849 (3101-300E) - resolution 0.0001"/0.001mm]
- Coolant/dust proof, IP65 Ingress protection level
- Button function: on/off, set, inch/mm, ABS/INC
- Data output
- Auto power off
- Battery LR44
- Ratchet stop
- Carbide tips
- Supplied with spherical anvil
- Setting standards are included (exception: micrometers 0-1"/0-25mm)
- Supplied in fitted storage case

### Friction Thimble


Range (Inch/mm)	Accuracy (Inch)	L (Inch)	a (Inch)	b (Inch)	c (Inch)	INSIZE No.	Code
0-1/0-25	±0.0001	1.358	0.236	0.984	0.118	*3101-25FE	877302

Range (Inch/mm)	Accuracy (Inch)	L (Inch)	L1 (Inch)	L2 (Inch)	a (Inch)	b (Inch)	c (Inch)	Ød (Inch)	Øe (Inch)	INSIZE No.	Code
0-1/0-25	±0.00010	1.280	1.752	2.520	0.236	0.945	0.118	0.256	0.709	*3101-25E	280838
1-2/25-50	±0.00010	2.264	1.752	2.520	0.315	1.260	0.118	0.256	0.709	*3101-50E	280839
2-3/50-75	±0.00015	3.248	1.752	2.520	0.315	1.752	0.118	0.256	0.709	*3101-75E	280840
3-4/75-100	±0.00015	4.232	1.752	2.520	0.315	2.244	0.118	0.256	0.709	*3101-100E	280841
4-5/100-125	±0.00015	5.236	1.752	2.520	0.394	2.756	0.118	0.256	0.709	3101-125E	280842
5-6/125-150	±0.00015	6.240	1.752	2.520	0.394	3.228	0.118	0.256	0.709	3101-150E	280843
6-7/150-175	±0.00015	7.244	1.752	2.520	0.472	3.720	0.217	0.256	0.709	3101-175E	280829
7-8/175-200	±0.00015	8.248	1.752	2.520	0.472	4.213	0.217	0.256	0.709	3101-200E	280830
8-9/200-225	±0.00020	9.291	1.752	2.520	0.906	5.098	0.217	0.256	0.709	3101-225E	280846
9-10/225-250	±0.00015	10.217	1.752	2.520	0.764	5.610	0.217	0.256	0.709	3101-250E	280847
10-11/250-275	±0.00020	11.220	1.752	2.520	0.764	6.102	0.217	0.256	0.709	3101-275E	280848
11-12/275-300	±0.00020	12.224	1.752	2.520	0.764	6.594	0.217	0.256	0.709	3101-300E	280849
0-3/0-75										SET: Included: 3101-25E, 3101-50E, 3101-75E	3101-33E 877303
0-4/0-100										SET: Included: 3101-25E, 3101-50E, 3101-75E, 3101-100E	3101-44E 285125
0-6/0-150										SET Included: 3101-25E, 3101-50E, 3101-75E, 3101-100E, 3101-125E, 3101-150E	3101-66E 285126

## Electronic Outside Micrometers



Coolant Proof

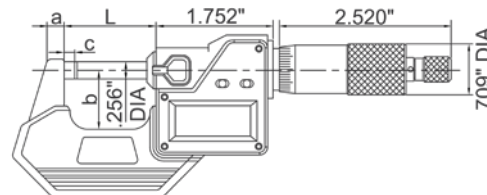

- Resolution: 0.00005"/0.001mm
- Coolant/dust proof, IP65 Ingress protection level
- Button function: on/off, set, inch/mm, ABS/INC
- No data output
- Auto power off
- Battery LR44
- Carbide measuring faces
- Friction thimble
- Supplied with spherical anvil
- Setting standards are included (exception: micrometers 0-1"/0-25mm)
- Supplied in fitted storage case

Range (Inch/mm)	Accuracy (Inch)	L (Inch)	a (Inch)	b (Inch)	c (Inch)	INSIZE No.	Code
0-1/0-25	±0.00010	1.358	0.236	0.984	0.118	3108-1	280868
1-2/25-50	±0.00010	2.343	0.315	1.260	0.118	3108-2	280869