


Tiny Tools

Solid Carbide – For Working on Small Bores (*continued*)

Threading Bars – Partial Profile 60° – Coolant Through


MIR - THREADING BARS - PARTIAL PROFILE 60°

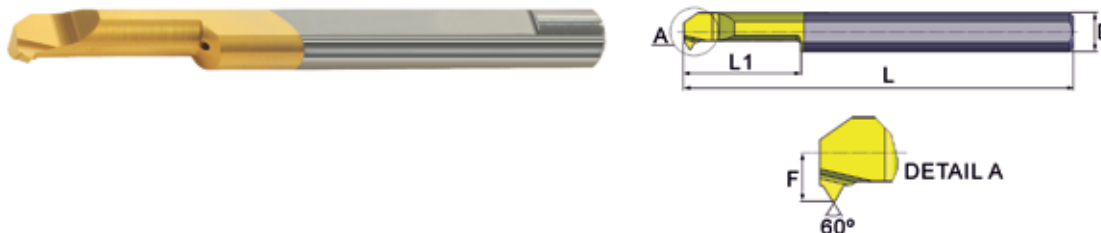

D (mm)	L Inch (mm)	L1 Inch (mm)	Pitch Range (TPI)	Pitch Range (mm)	F Inch (mm)	Minimum Bore Diameter Inch (mm)	Reference Holders	Code
3.0	1.5 (39)	0.59 (15)	32-24	0.8-1.0	0.06 (1.4)	0.13 (3.2)	570102	570076
4.0	2.0 (50)	0.59 (15)	32-24	0.8-1.0	0.07 (1.7)	0.16 (4.1)	570104	570078
6.0	2.0 (50)	0.59 (15)	24-16	1.0-1.5	0.09 (2.2)	0.24 (6.1)	570106	570080

Chamfering Boring Bars – Coolant Through

MCR - CHAMFERING BORING BARS

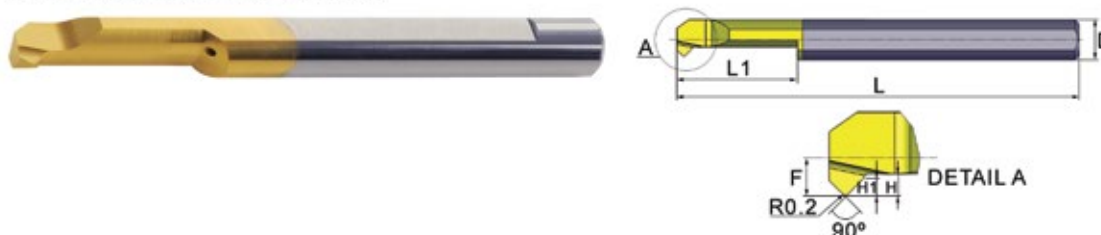

D (mm)	L Inch (mm)	L1 Inch (mm)	R Inch (mm)	H Inch (mm)	H1 Inch (mm)	F Inch (mm)	Minimum Bore Diameter Inch (mm)	Reference Holders	Code
3.0	1.5 (39)	0.39 (10)	0.008 (0.20)	0.03 (0.8)	0.01 (0.3)	0.05 (1.3)	0.12 (3.1)	570102	570082
4.0	2.0 (50)	0.59 (15)	0.008 (0.20)	0.03 (0.8)	0.02 (0.4)	0.07 (1.7)	0.16 (4.1)	570104	570084
6.0	2.0 (50)	0.59 (15)	0.008 (0.20)	0.06 (1.5)	0.03 (0.7)	0.11 (2.8)	0.24 (6.1)	570106	570086