


Boring Bars

S-MWLN/L for Negative Trigon WN_ _ Inserts

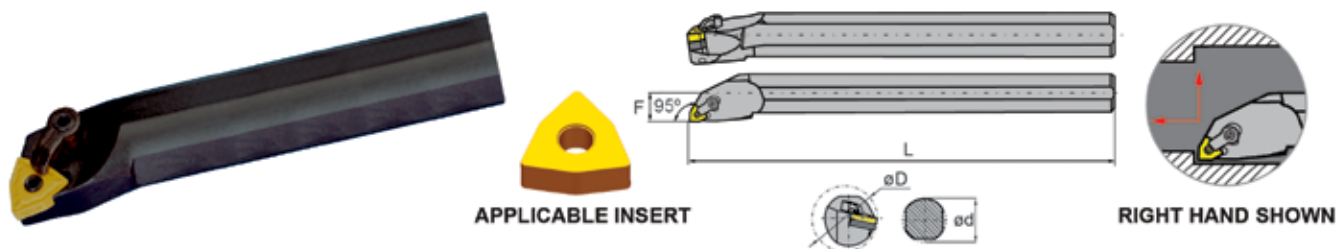


APPLICABLE INSERT

RIGHT HAND SHOWN

S-MWLN/L	Ød (Inch)	L (Inch)	ØD (Inch)	F (Inch)	Right Hand Code	Left Hand Code	Accessories				
							Applicable Insert	Clamp Code	Clamp Screw Code	Lock Pin Code	Shim Code
12-3	0.75	10	0.93	0.500	534459	534469	WN_ _33_	534234	-	534244	534252
12-4	0.75	10	0.93	0.500	534460	534470	WN_ _43_	534235	-	534240	534254
16-4	1.00	12	1.28	0.640	534461	534471	WN_ _43_	534235	-	534240	534254
20-4	1.25	14	1.53	0.785	534462	534472	WN_ _43_	534230	534250	534240	534275
24-4	1.50	14	1.78	0.890	534463	534473	WN_ _43_	534230	534250	534240	534275

S-SCLCR/L for 7° Positive 80° Rhombic CC_ _ Inserts

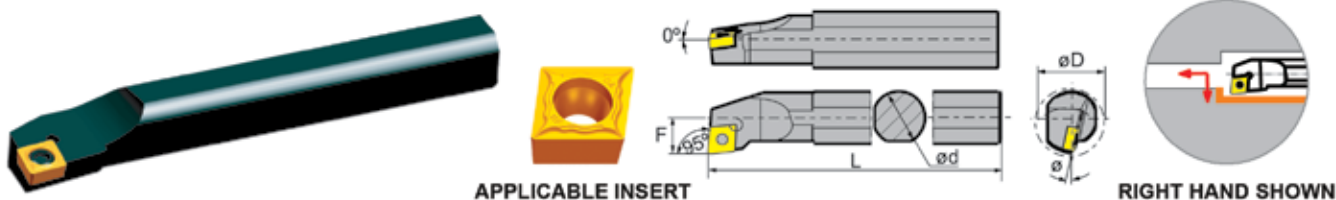

APPLICABLE INSERT

RIGHT HAND SHOWN

S-SCLCR/L	Ød (Inch)	L (Inch)	ØD (Inch)	F (Inch)	Right Hand Code	Left Hand Code	Accessories		
							Applicable Insert	Screw Code	Torx® Key Code
4-2	0.315	4	0.354	0.188	534301	534311	CC_ _21.5_	210354	549505
6-2	0.375	6	0.468	0.250	534302	534312	CC_ _21.5_	210350	549505
8-2	0.500	7	0.560	0.290	534303	534313	CC_ _21.5_	210350	549505
8-3	0.500	7	0.600	0.312	534304	534314	CC_ _32.5_	210351	302319
10-3	0.625	8	0.866	0.406	534305	534315	CC_ _32.5_	210351	302319
12-3	0.750	10	0.920	0.500	534306	534316	CC_ _32.5_	210351	302319
16-3	1.000	12	1.120	0.609	534307	534317	CC_ _32.5_	210351	302319