


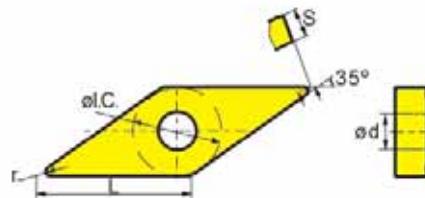


Turning Inserts

VNMG PM for Medium Machining



NEGATIVE 35° RHOMBIC

VNMG-PM

Coated Grades - CVD

YBC151

| ANSI | ISO | L (Inch) | ØI.C. (Inch) | S (Inch) | Ød (Inch) | r (Inch) | Code |
|-------------|----------------|----------|--------------|----------|-----------|----------|--------|
| VNMG-331-PM | VNMG-160404-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.016 | 575762 |
| VNMG-332-PM | VNMG-160408-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.031 | 575804 |
| VNMG-333-PM | VNMG-160412-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.047 | 575828 |

YBC251

| ANSI | ISO | L (Inch) | ØI.C. (Inch) | S (Inch) | Ød (Inch) | r (Inch) | Code |
|-------------|----------------|----------|--------------|----------|-----------|----------|--------|
| VNMG-331-PM | VNMG-160404-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.016 | 575762 |
| VNMG-332-PM | VNMG-160408-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.031 | 575804 |
| VNMG-333-PM | VNMG-160412-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.047 | 575830 |

YBC351

| ANSI | ISO | L (Inch) | ØI.C. (Inch) | S (Inch) | Ød (Inch) | r (Inch) | Code |
|-------------|----------------|----------|--------------|----------|-----------|----------|--------|
| VNMG-331-PM | VNMG-160404-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.016 | 575762 |
| VNMG-332-PM | VNMG-160408-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.031 | 575804 |
| VNMG-333-PM | VNMG-160412-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.047 | 575830 |

YBD102

| ANSI | ISO | L (Inch) | ØI.C. (Inch) | S (Inch) | Ød (Inch) | r (Inch) | Code |
|-------------|----------------|----------|--------------|----------|-----------|----------|--------|
| VNMG-331-PM | VNMG-160404-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.016 | 575762 |
| VNMG-332-PM | VNMG-160408-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.031 | 575804 |
| VNMG-333-PM | VNMG-160412-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.047 | 575830 |

YBD151

| ANSI | ISO | L (Inch) | ØI.C. (Inch) | S (Inch) | Ød (Inch) | r (Inch) | Code |
|-------------|----------------|----------|--------------|----------|-----------|----------|--------|
| VNMG-332-PM | VNMG-160408-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.031 | 575812 |
| VNMG-333-PM | VNMG-160412-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.047 | 575836 |

YBD152

| ANSI | ISO | L (Inch) | ØI.C. (Inch) | S (Inch) | Ød (Inch) | r (Inch) | Code |
|-------------|----------------|----------|--------------|----------|-----------|----------|--------|
| VNMG-332-PM | VNMG-160408-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.031 | 575812 |

YBM251

| ANSI | ISO | L (Inch) | ØI.C. (Inch) | S (Inch) | Ød (Inch) | r (Inch) | Code |
|-------------|----------------|----------|--------------|----------|-----------|----------|--------|
| VNMG-331-PM | VNMG-160404-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.016 | 575770 |
| VNMG-332-PM | VNMG-160408-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.031 | 575816 |
| VNMG-333-PM | VNMG-160412-PM | 0.654 | 0.375 | 0.187 | 0.150 | 0.047 | 575838 |